

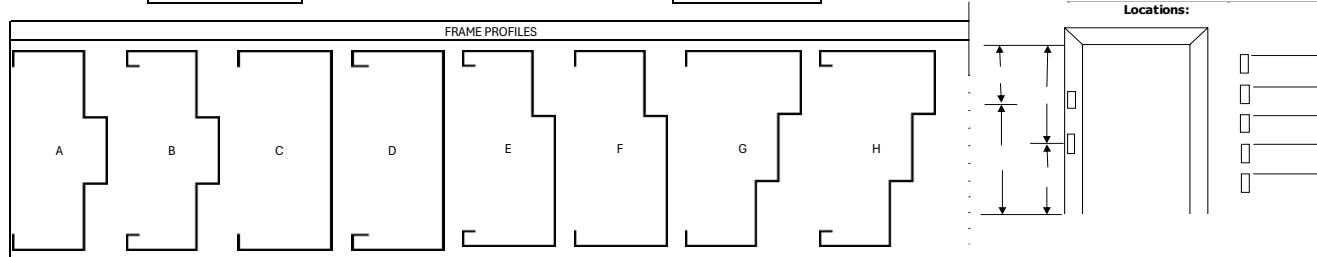


☐ Order

☐ Quote

Date: _____
Date Requested: _____

LOCATIONS	TYPE	ANCHORS	HINGE	STRIKES	MATERIAL		CONSTRUCTION	GLAZING BEAD
PI PIONEER	S - SINGLE	AIFS - ADJUSTABLE FLOOR SHOES	A1 - 3 1/2	A - ASA	GAUGE	TYPE	KD - KNOCKDOWN FW - FACE WELD	I - INSTALLED L - LOOSE
	P - PAIR	AJMS - ADJUSTABLE MASONRY ANCHOR	A2 - 4	AD - ASA x DEADBOLT	0 - 20 GA	A - A40		
	C - CASED OPEN	AP - WOOD STRAP + MASONRY STRAP	B1 - 4 1/2" SW	CVR - CONC. VERT. ROD	8 - 18 GA	B - A60	CFW - CONT. FULL WELD	
	M - COMMUNICATING	COMBO - ZEE + MASONRY STRAP	B2 - 4 1/2" HW	D - DEADBOLT	6 - 16 GA	C - G90		
	D - DOUBLE EGRESS	PFCDFS - DRYWALL PRESSURE FIT + WOOD STRAP	C1 - 5" SW	FB - FLUSH BOLT	4 - 14 GA			
	E - ELEVATION	FS - FLOOR SHOES	C2 - 5" HW	M - MULLION	2 - 12 GA			
	BL - BORROWED LITE	PD - PUNCH & DIMPLE	* - SEE NOTES	N - NONE/BLANK	LABEL			
	SL - SIDELITE	PDP - PIPE & PLATE	HANDING	R - RIM PANIC	N - NONE			
	TL - TRANSOM LITE	RFS - REVERSE FLOOR SHOE	LH - LEFT HAND	RFB - REVERSIBLE FLUSH BOLT	UL - RATED			
	* WRITE ON CHART	RABBET	ZEE - METAL STUD ANCHOR	RH - RIGHT HAND	SVR - SURF. VERT. ROD			
	E - EQUAL RABBET		LHR - LEFT HAND REV.	T - T-STRIKE				
	U - UNEQUAL RABBET		RHR - RIGHT HAND REV.	TD - ASA x DEADBOLT				
	BOLD TEXT = STANDARD OPTIONS		DBL - DOUBLE (PAIR)					
			DA - DOUBLE ACTING)					

[illegible]